

Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard

This procedure outlines the Electric Reliability Organization (ERO) process for supporting the Frequency Response Standard (FRS). A Procedure revision request may be submitted to the ERO for consideration. The revision request must provide a technical justification for the suggested modification. The ERO shall post the suggested modification for a 45-day formal comment period and discuss the revision request in a public meeting. The ERO will make a recommendation to the NERC BOT, which may adopt the revision request, reject it, or adopt it with modifications. Any approved revision to this Procedure shall be filed with FERC for informational purposes.

Event Selection Process

Event Selection Objectives

The goals of this procedure are to outline a transparent, repeatable process to annually identify a list of frequency events to be used by Balancing Authorities (BA) to calculate their Frequency Response to determine:

- Whether the BA met its Frequency Response Obligation, and
- An appropriate fixed Bias Setting.

Event Selection Criteria



1. The ERO will use the following criteria to select FRS frequency excursion events for analysis. The events that best fit the criteria will be used to support the FRS. The evaluation period for performing the annual Frequency Bias Setting and the Frequency Response Measure (FRM) calculation is December 1 of the prior year through November 30 of the current year.
2. The ERO will identify 20 to 35 frequency excursion events in each Interconnection for calculating the Frequency Bias Setting and the FRM. If the ERO cannot identify 20 frequency excursion events in a 12 month evaluation period satisfying the criteria below, then similar acceptable events from the subsequent year's evaluation period will be included with the data set by the ERO for determining FRS compliance. This is described later.
3. The ERO will use three criteria to determine if an acceptable frequency excursion event for the FRM has occurred:
 - a. The change in frequency as defined by the difference from the A Value to Point C and the arrested frequency Point C exceeds the excursion threshold values specified for the Interconnection in Table 1 below.
 - i. The A Value is computed as an average over the period from -16 seconds to 0 seconds before the frequency transient begins to decline.
 - ii. Point C is the arrested value of frequency observed within 12 seconds following the start of the excursion.

Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard

Interconnection	A Value to Pt C	Point C (Low)	Point C (High)
East	0.04Hz	< 59.96	> 60.04
West	0.07Hz	< 59.95	> 60.05
ERCOT	0.15Hz	< 59.90	> 60.10
HQ	0.30Hz	< 59.85	> 60.15

Table 1: Interconnection Frequency Excursion Threshold Values

- b. The time from the start of the rapid change in frequency until the point at which Frequency has stabilized within a narrow range should be less than 18 seconds.
 - c. If any data point in the B Value average recovers to the A Value, the event will not be included.
4. Pre-disturbance frequency should be relatively steady and near 60.000 Hz for the A Value. The A Value is computed as an average over the period from -16 seconds to 0 seconds before the frequency transient begins to decline. For example, given the choice of the two events below, the one on the right is preferred as the pre-disturbance frequency is stable and also closer to 60 Hz.

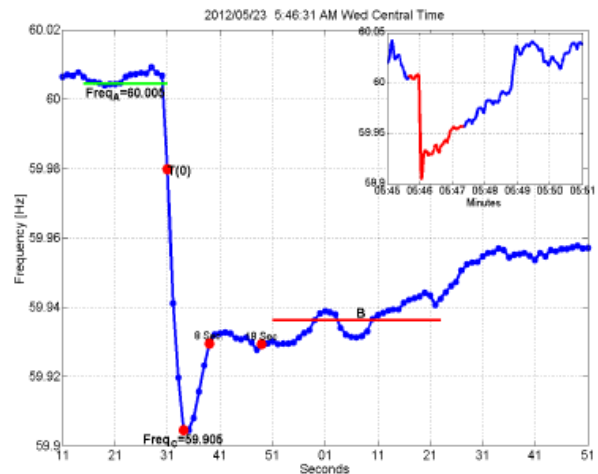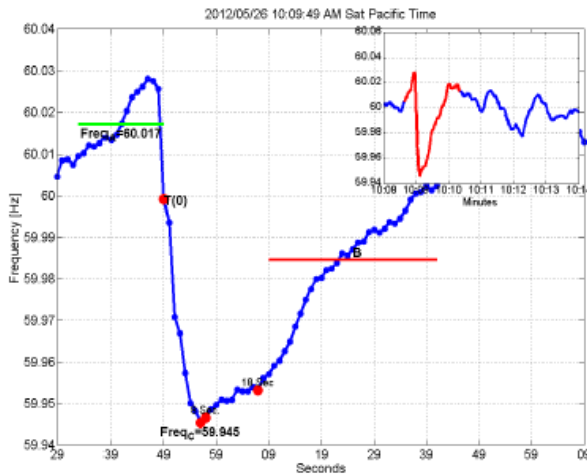

5. Excursions that include 2 or more events that do not stabilize within 18 seconds will not be considered.
6. Frequency excursion events occurring during periods:
 - (i) when large interchange schedule ramping or load change is happening, or
 - (ii) within 5 minutes of the top of the hour,

Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard

will be excluded from consideration if other acceptable frequency excursion events from the same quarter are available.

7. The ERO will select the largest (A Value to Point C) 2 or 3 frequency excursion events occurring each month. If there are not 2 frequency excursion events satisfying the selection criteria in a month, then other frequency excursion events should be picked in the following sequence:
 - a. From the same event quarter of the year.
 - b. From an adjacent month.
 - c. From a similar load season in the year (shoulder vs. summer/winter)
 - d. The largest unused event.

As noted earlier, if a total of 20 events are not available in an evaluation year, then similar acceptable events from the next year's evaluation period will be included with the data set by the ERO for determining Frequency Response Obligation (FRO) compliance. The first year's small set of data will be reported and used for Bias Setting purposes, but compliance evaluation on the FRO will be done using a 24 month data set.

To assist Balancing Authority preparation for complying with this standard, the ERO will provide quarterly posting of candidate frequency excursion events for the current year FRM calculation. The ERO will post the final list of frequency excursion events used for standard compliance as specified in Attachment A of BAL-003-1. The following is a general description of the process that the ERO will use to ensure that BAs can evaluate events during the year in order to monitor their performance throughout the year.

Monthly

Candidate events will be initially screened by the "Frequency Event Detection Methodology" shown on the following link located on the NERC Resources Subcommittee area of the NERC website:

http://www.nerc.com/docs/oc/rs/Frequency_Event_Detection_Methodology_and_Criteria_Oct_2011.pdf. Each month's list will be posted by the end of the following month on the NERC website, <http://www.nerc.com/filez/rs.html> and listed under "Candidate Frequency Events".

Quarterly

The monthly event lists will be reviewed quarterly with the quarters defined as:

- December through February
- March through May
- June through August
- September through November

Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard

Based on criteria established in the "*Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard*", events will be selected to populate the FRS Form 1 for each Interconnection. The Form 1's will be posted on the NERC website, in the Resources Subcommittee area under the title "Frequency Response Standard Resources". Updated Form 1's will be posted at the end of each quarter listed above after a review by the NERC RS' Frequency Working Group. While the events on this list are expected to be final, as outlined in the selection criteria, additional events may be considered, if the number of events throughout the year do not create a list of at least 20 events. It is intended that this quarterly posting of updates to the FRS Form 1 would allow BAs to evaluate the events throughout the year, lessening the burden when the yearly posting is made.

Annually

The final FRS Form 1 for each Interconnection, which would contain the events from all four quarters listed above, will be posted as specified in Attachment A. Each Balancing Authority reports its previous year's Frequency Response Measure (FRM), Frequency Bias Setting and Frequency Bias type (fixed or variable) to the ERO as specified in Attachment A using the final FRS Form 1. The ERO will check for errors and use the FRS Form 1 data to calculate CPS limits and FROs for the upcoming year.

Once the data listed above is fully reviewed, the ERO may adjust the implementation specified in Attachment A for changing the Frequency Bias Settings and CPS limits. This allows flexibility in when each BA implements its settings.

Process for Adjusting Interconnection Minimum Frequency Bias Setting

This procedure outlines the process the ERO is to use for modifying minimum Frequency Bias Settings to better meet reliability needs. The ERO will adjust the Frequency Bias Setting minimum in accordance with this procedure.

The ERO will post the minimum Frequency Bias Setting values on the ERO website along with other balancing standard limits.

Under BAL-003-1, the minimum Frequency Bias Settings will be moved toward the natural Frequency Response in each interconnection. In the first year, the minimum Frequency Bias Setting for each interconnection is shown in Table 2 below. Each Interconnection Minimum Frequency Bias Setting is based on the sum of the non-coincident peak loads for each BA from the currently available FERC 714 Report or equivalent. This non-coincident peak load sum is multiplied by the percentage shown in Table 2 to get the Interconnection Minimum Frequency Bias Setting. The Interconnection Minimum Frequency Bias Setting is allocated among the BAs on an interconnection using the same allocation method as is used for the allocation of the Frequency Response Obligation (FRO).

Interconnection	Interconnection Minimum Frequency Bias Setting (in MW/0.1Hz)
Eastern	0.9% of non-coincident peak load
Western	0.9% of non-coincident peak load
ERCOT*	N/A
HQ*	N/A

Table 2. Frequency Bias Setting Minimums

*The minimum Frequency Bias Setting requirement does not apply to a Balancing Authority that is the only Balancing Authority in its Interconnection. These Balancing Authorities are solely responsible for providing reliable frequency control of their Interconnection. These Balancing Authorities are responsible for converting frequency error into a megawatt error to provide reliable frequency control, and the imposition of a minimum bias setting greater than the magnitude the Frequency Response Obligation may have the potential to cause control system hunting, and instability in the extreme.

The ERO, in coordination with the regions of each interconnection, will annually review Frequency Bias Setting data submitted by BAs. If an Interconnection's total minimum Frequency Bias Setting exceeds (in absolute value) the Interconnection's total natural Frequency Response by more (in absolute value) than 0.2 percentage points of peak load (expressed in MW/0.1Hz), the minimum Frequency Bias Setting for BAs within that Interconnection may be reduced (in absolute value) in the subsequent years FRS Form 1 based on the technical evaluation and consultation with the regions affected by 0.1 percentage point of peak load (expressed in MW/0.1Hz) to better match that Frequency Bias Setting and natural Frequency Response.

Procedure for ERO Support of Frequency Response and Frequency Bias Setting Standard

The ERO, in coordination with the regions of each Interconnection, will monitor the impact of the reduction of minimum frequency bias settings, if any, on frequency performance, control performance, and system reliability. If unexpected and undesirable impacts such as, but not limited to, sluggish post-contingency restoration of frequency to schedule or control performance problems occur, then the prior reduction in the minimum frequency bias settings may be reversed, and/or the prospective reduction based on the criterion stated above may not be implemented.

Interconnection Frequency Response Obligation Methodology

This procedure outlines the process the ERO is to use for determining the Interconnection Frequency Response Obligation (IFRO).

The following are the formulae that comprise the calculation of the IFROs.

$$DF_{Base} = F_{Start} - UFLS$$

$$DF_{CC} = DF_{Base} - CC_{Adj}$$

$$DF_{CBR} = \frac{DF_{CC}}{CB_R}$$

$$MDF = DF_{CBR} - BC'_{Adj}$$

$$ARCC = RCC - CLR$$

$$IFRO = \frac{ARCC}{10 * MDF}$$

Where:

- DF_{Base} is the base delta frequency.
- F_{Start} is the starting frequency determined by the statistical analysis.
- UFLS is the highest UFLS trip setpoint for the interconnection.
- CC_{Adj} is the adjustment for the differences between 1-second and sub-second Point C observations for frequency events. A positive value indicates that the sub-second C data is lower than the 1-second data.
- DF_{CC} is the delta frequency adjusted for the differences between 1-second and sub-second Point C observations for frequency events.
- CB_R is the statistically determined ratio of the Point C to Value B.
- DF_{CBR} is the delta frequency adjusted for the ratio of the Point C to Value B.
- BC'_{Adj} is the statistically determined adjustment for the event nadir being below the Value B (Eastern Interconnection only) during primary frequency response withdrawal.
- MDF is the maximum allowable delta frequency.
- RCC is the resource contingency criteria.
- CLR is the credit for load resources.
- ARCC is the adjusted resource contingency criteria adjusted for the credit for load resources.
- IFRO is the interconnection frequency response obligation.